



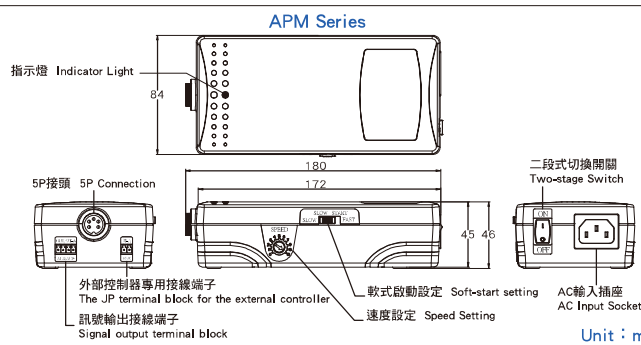

特點 Feature

- 雙電源：100-240V通用電源，輸出恆壓功能。
- 無段控制：電子科技產業追求薄、輕、短、小為未來科技主流，螺絲外形越薄，螺絲鎖付緊固要求越高，無論較長或較短螺絲均能鎖付，同時滿足高精度與低質量的需求。
- 軟式啟動：電源供應器內置0-1秒軟式啟動功能，第一圈慢速轉入至中心孔穴時即全速鎖入，有效降低螺絲與被鎖物之間的鬆動率。
- Universal power source: It is suitable for any power source ranges between 100-240VAC.
- Stepless control: The electronic technology industry pursues thinness, lightness, shortness and smallness as the main stream in the future; the smaller the screw, the higher locking and tightening is required; both long and short screws can be locked and meet the requirements of high precision and low inertia at the same time.
- Soft start: There is 0-1 sec. soft-start function inside the power supply. The speed of fastening will gradually change from slow to fast motion during the fastening task. This lowers screw's levels of shaking during the operation.

尺寸圖 Dimension

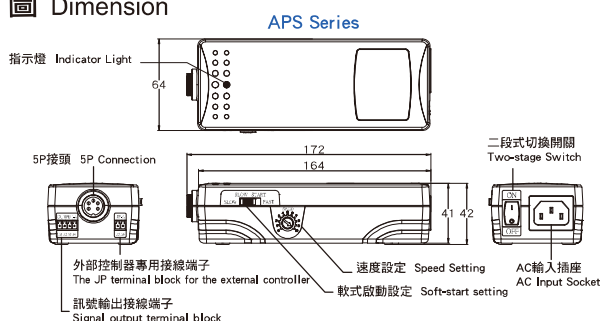

機型規格 Model and Specifications

項目 ITEM	機種名 Model No.	APS-201B	APS-301A	APS-331A	APS-301B	APS-351B	APM-301A	APM-301B	APM-301C	
輸入電壓VAC Input Voltage VAC		100-240V、50/60Hz								
輸出電壓VDC Output Voltage VDC		9-19V	20-30V	20-33V	20-30V	25-35V	20-30V			
軟式啟動 Soft-start		無此功能 N/A	無此功能 N/A	無此功能 N/A	0-1sec.	0-1sec.	無此功能 N/A	無此功能 N/A	無此功能 N/A	
輸出電壓設定 Output Voltage setting		無段設定 Stepless control								
輸出端子 Output Pin		5針 5 pin	5針 5 pin	3針 3 pin	5針 5 pin	5針 5 pin	5針 5 pin	5針 5 pin	6針 6 pin	
內部訊號輸出 Internal signal output		啟動訊號/煞車訊號 Switch signal/Shut off signal								
外部訊號輸入 External signal input		啟動訊號 Switch signal								
可控制起子數 No. of Screwdriver/power supply		1支 1 pcs								
消耗功率(W) Power(W)		38W	60W	56.1W	60W	59.5W	75W			
適用電動起子型號 Applicable Electric Screwdriver models		ASA-S1000M ASA-S2000M ASA-S2500M	BS-2000 BS-3000 BS-4000 BS-4000F BS-6000 BS-6500	AS-3636 AS-4636 AS-6636	ASA-S1000M ASA-S2000M ASA-S2500M ASA-2000M/S ASA-3000M/S ASA-4000M/S ASA-5600M	ASA-2000/S ASA-3000/S ASA-4000/S ASA-4500/S ASA-5000M	BS-6800	ASA-7000/S ASA-8000/S ASA-7000/PS ASA-8000/PS	ASA-6000/PS ASA-6500/PS ASA-6800/PS ASA-7500/PS ASA-8500/PS	
體積(mm) Dimension (mm)		164X64X42mm					172X84X46mm			
重量(g) Weight (g)		300g					380g			
AC電源線長度(m) AC cable length (m)		1.8M								
安規認證 Approval by		CB,CE,UL(CUL),CCC,ROHS,REACH								
附屬品 Accessories		小螺絲刀、2P/4P插座式端子×2、AC電源線 Small screwdriver, 2P/4P socket terminal 2 pieces, and AC cable								