


# WQB 4000SOPS

Product no.: T0053370699

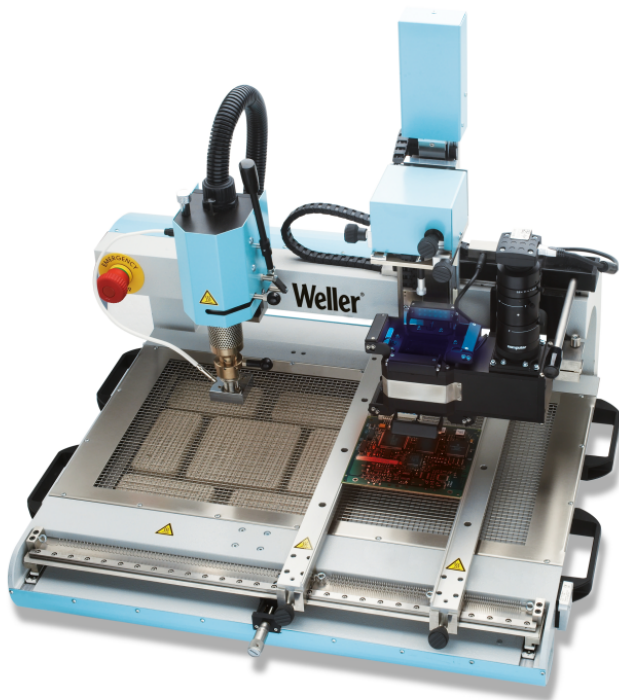

## Benefits

- › 2300 W / 230 V
- › BGA / SMT Rework system
- › For component placement with placing system camera support

For this purpose, we recommend:



Solder fume extractors



Pre-heating plates



Zubehoer



Soldering tips



**Technical Data**

Dimensions L x W x H (inches)	24,8 x 24,8 x 25,6 (static)
Dimensions L x W x H (mm)	692 x 580 x 680 (static)
Space requirement/workspace L x W x H (inches)	43,3 x 25,6 x 26,8
Space requirement/workspace L x W x H (mm)	Dynamisch: 1030 x 580 x 680
Recommended assembly size (mm)	---
Recommended component size (mm)	4,5 x 4,5 - 50 x 50
Compressed air connection	---
Compressed air connection accessory	---
Compressed air supply kPa/bar	400 - 600 / 4 - 6
Air consumption l/min	60 - 100
Max. hot air flow rate l/min	5 - 50
ESD-safe	on
Noise level (distance 1 m) dB(A)	< 69
Weight (approx.) in kg	40
Power consumption	2300 W
Rated output of top heating (W)	700
Rated output of bottom heating (W)	1600
Protection class	1
Voltage	230 V / 50-60 Hz
Temperature range of top heating (°C)	50 - 400
Temperature range of bottom heating (°C)	50 - 400
Optical positioning	on
Positioning aid	Splitoptik
Temperature accuracy of top heating	± 10°C (± 18°F)
Temperature accuracy of bottom heating	tbd
Thermocouple connection	3 x Type-K

Owning the bench



PROFESSIONAL



FILTRATION



EREM



XCELITE