


# WXD 2

2-Channel Power Unit, 200 W (255 W)  
Product no.: T0053426699N

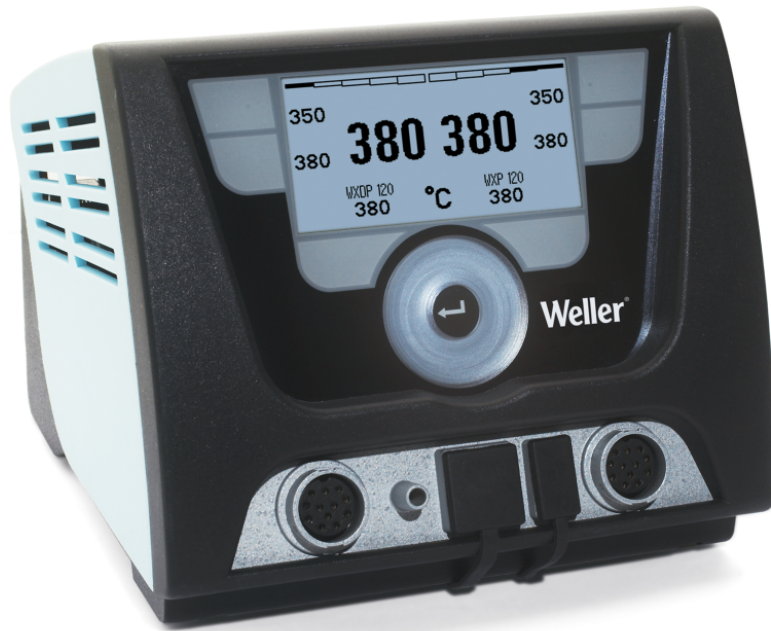

## Benefits

- › Cost effective because only one station is needed
- › Less rework by optimal use of tools and the correct working temperature. Reduction of running costs by longer tip lifetime.
- › Desoldering iron with stand-by mode
- › ESD safe
- › For operation with external compressed air

For this purpose, we recommend:



Solder fume extractors



Soldering irons



Cleaning




Pre-heating plates



**Technical Data**

Dimensions L x W x H (mm)	174 x 154 x 135
Dimensions L x W x H (inches)	6.69 x 5.94 x 5.12
Weight (approx.) in kg	3.8
Voltage	230 V, 50 Hz
Power	200 W (255 W)
Channels	2
Temperature range (depends on tool) °C	50 - 550
Temperature range (depends on tool) °F	150 - 999
Temperature accuracy °C	±9
Temperature accuracy °F	±17
Temperature stability °C	±2
Temperature stability °F	±4
Equipotential bonding socket	Via 3,5 mm pawl socket on back of unit.
Display	255 x 128 pixels / Backlighting
Air consumption l/min	35
Operating pressure in bar/psi	4,0 - 6,0 / 58 - 87
Capacity l/min	---
Vacuum	max. 55 kPa (8psi)

Owning the bench



PROFESSIONAL



FILTRATION



EREM



XCELITE